




EHRlich – REKUPERAČNÉ VÝMENNÍKY

LAMELOVÉ

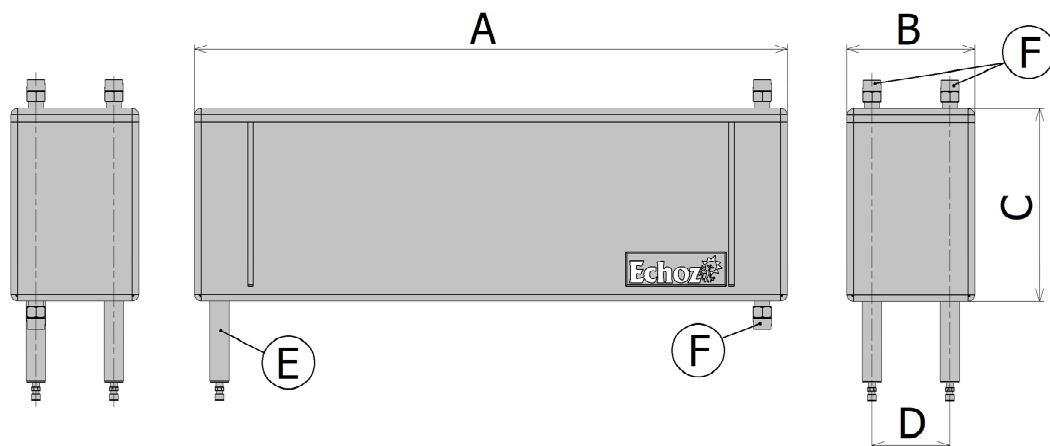

TYP	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F
ERV-21	480	190	235	108	16	3/4"
ERV-41	680	190	235	108	16	3/4"
ERV-61	880	190	235	108	16	3/4"
ERV-71	880	190	285	108	22	3/4"
ERV-91	880	190	335	108	22	3/4"
ERV-101	880	190	385	108	28	3/4"
ERV-121	880	190	425	108	28	3/4"
ERV-141	880	190	485	108	28	3/4"
ERV-171	880	190	585	108	28	3/4"

TYP	Hmotnost (kg)	Topný výkon (kW)	Teplosměnná plocha (m ²)		Nejvyšší dovolený tlak PS (MPa)	Zkušební tlak PT (MPa)	Tlaková ztráta (kPa)
			primár	sekundár			
ERV-21	7,3	2,2	0,16	0,27	3,1	4,5	max. 10
ERV-41	10,2	4,60	0,27	0,45	3,1	4,5	max. 10
ERV-61	13,5	6,00	0,54	0,48	3,1	4,5	max. 10
ERV-71	16,2	7,30	0,63	0,50	3,1	4,5	max. 10
ERV-91	19,4	8,70	0,76	0,70	3,1	4,5	max. 10
ERV-101	23,0	10,3	0,88	0,89	3,1	4,5	max. 10
ERV-121	25,8	12,1	1,02	1,19	3,1	4,5	max. 10
ERV-141	29,2	14,2	1,15	1,27	3,1	4,5	max. 10
ERV-171	35,2	16,2	1,26	1,38	3,1	4,5	max. 10

